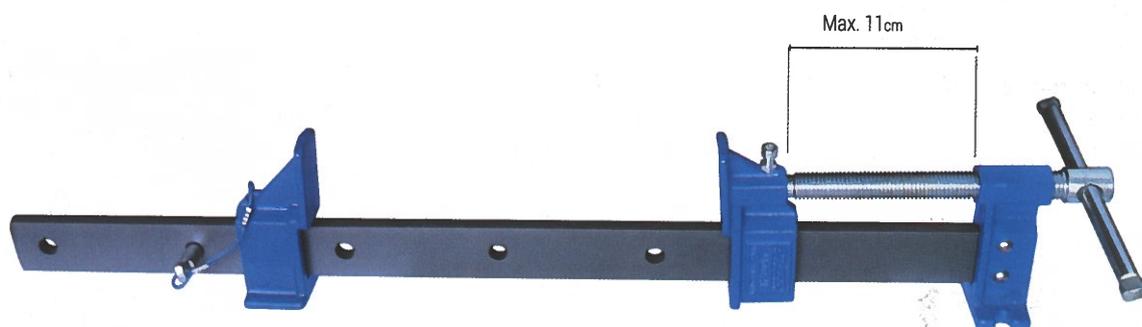


MOD. H

TIGE 40 x 10 mm **PUISSANCE DE SERRAGE** 25000 N · 2500kg
BAR **MAXIMUM DRUK**

COD	 cm	 cm	 kg	
23050	50	6	4,0	2
23075	75	6	4,8	
23100	100	6	5,5	
23125	125	6	6,3	
23150	150	6	7,0	
23175	175	6	7,8	
23200	200	6	8,5	
23225	225	6	9,3	1
23250	250	6	10,0	
23275	275	6	10,8	
23300	300	6	11,5	

Têtes en fonte nodulaire.

- Tige tout acier laminé à haute résistance (90 kg/mm²).
- Tige avec traitement peinture antioxydant.
- Têtes avec peinture epoxy.

Paneelklem.

- Extra resistant gewalst stalen bar (90KG/mm²).
- Anti roest behandeld.
- Bekken gecoat met epoxy verf.